

# California Department of Corrections & Rehabilitation

## MALE MEASURE FORM

☐ Stab Vest ☐ Combination Vest ☐ Carrier Only ☐ Ballistic Vest

### ALL INFORMATION MUST BE FILLED OUT



1 Please Print  
Job Class: \_\_\_\_\_ Last Name: \_\_\_\_\_ First Name: \_\_\_\_\_

Telestaff #: \_\_\_\_\_ Institution/Facility: \_\_\_\_\_

Measured By: \_\_\_\_\_ Date Of Measurement: \_\_\_\_\_

HEIGHT: \_\_\_\_\_ ft. \_\_\_\_\_ ins. WEIGHT: \_\_\_\_\_ lbs.

CURRENT SIZE: \_\_\_\_\_  
(EXAMPLE: 2015-2015)

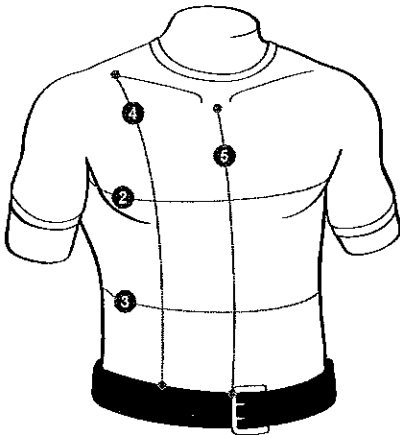

All measurement points listed below refer to the illustration. Take ALL measurements to the nearest full inch. If rounding is necessary, round UP on Girth and round DOWN on length.

### THE FOLLOWING MEASUREMENTS SHOULD BE TAKEN STANDING

2 FULL CHEST MEASUREMENT  
Using a soft tape measure, measure around the back, directly under arm pits, meeting across center chest front. \_\_\_\_\_ ins.

3 TOTAL GIRTH MEASUREMENT  
Use this Total Girth Measurement for selecting a Front/Back Panel Width below. Measure waist at widest circumference in between the chest and the top of the duty belt. Add the desired overlap to the girth measurement to achieve "Total Girth" measurement. SEE CHART A **ROUND UP**

GIRTH \_\_\_\_\_ + OVERLAP \_\_\_\_\_ = TOTAL GIRTH \_\_\_\_\_ ins.

### Overlap Calculation

- ☐ 1" Overlap – add 3" - COMBO OR BALLISTIC  
☐ 2" Overlap – add 5" - STAB

### THE FOLLOWING MEASUREMENTS SHOULD BE TAKEN STANDING

4 FRONT SIDE LENGTH MEASUREMENT  
Use this Front Side Length Measurement for selecting a Front Panel Length below. Use soft measuring tape. Place tape at bottom edge of clavicle bone and measure straight down to belly button. **ROUND DOWN**

FRONT SIDE STANDING \_\_\_\_\_ = FRONT SIDE LENGTH \_\_\_\_\_ ins.

NOTE: Front/Back panel lengths should not be more than 2" difference.

### THE FOLLOWING MEASUREMENTS SHOULD BE TAKEN SEATED

5 FRONT SIDE LENGTH MEASUREMENT  
Use soft measuring tape. Place tape at bottom edge of clavicle bone and measure straight down to belly button. **ROUND DOWN**

FRONT SIDE SEATED \_\_\_\_\_ = FRONT CENTER LENGTH \_\_\_\_\_ ins.

NOTE: Front/Back panel lengths should not be more than 2" difference.

### THE FOLLOWING MEASUREMENT SHOULD BE TAKEN STANDING

6 BACK LENGTH MEASUREMENT  
Use this Back Length Measurement for selecting a Back Panel Length below. Identify the bottom edge of the shirt collar. Measure from the bottom edge of the shirt collar to the top of the duty belt. SEE CHART B

Choose a size from the size column on the right based on the back length choice from the column on the left.

BACK MEASUREMENT \_\_\_\_\_ ins.

CHART A  
FRONT/BACK PANEL SIZES

Front	Back	Total
20	12	= 32"
17	17	= 34"
22	14	= 36"
20	17	= 37"
22	17	= 39"
20	20	= 40"

Front	Back	Total
22	20	= 42"
22	22	= 44"
25	20	= 45"
25	22	= 47"
28	20	= 48"
25	25	= 50"

Front	Back	Total
28	25	= 53"
30	25	= 55"
30	28	= 58"
30	30	= 60"
35	30	= 65"
35	35	= 70"

CHART B  
BACK LENGTH SIZES

BACK LENGTH	SIZE
11	9
12	10
13	10
14	11
15	12
16	13
17	14
18	14
19	15
20	16
21	17
22	18

SIZE:   -    
FRONT PANEL WIDTH FRONT PANEL LENGTH BACK PANEL WIDTH BACK PANEL LENGTH